


Dry Offset Baskı Alanı



Dry Ofset Baskı İçin

- Çalışmalarda kullanılacak dosya formatları;
Adobe Illustrator veya PDF olmalıdır.
(Tercihen PDF kullanılmalıdır.)

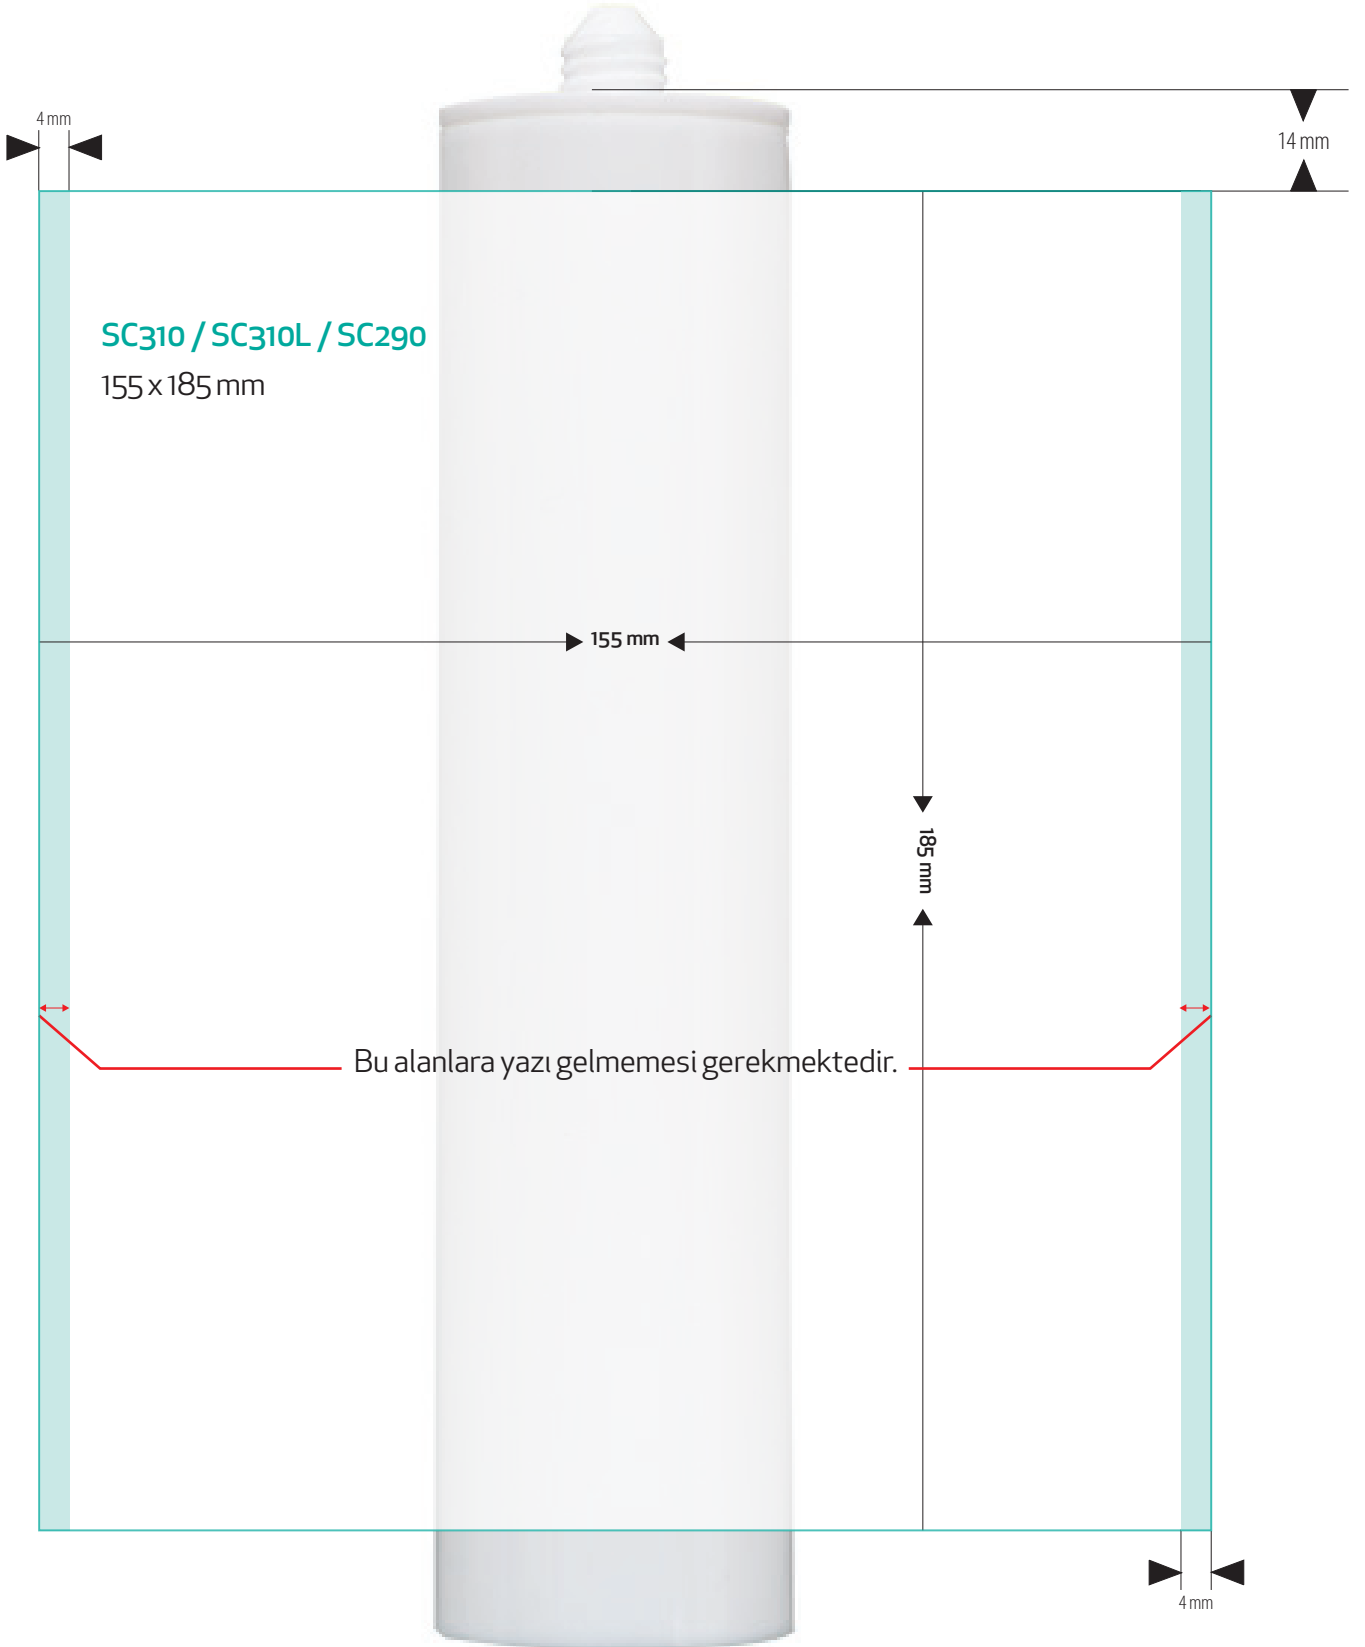

Resimler;



Grafikte kullanılan kadrajda iken 300 dpi,
Tercihen CMYK-TIFF veya PSD olmalıdır.
Diğer grafik unsurları vektörel olmalıdır.

Çalışma Illustrator formatında gönderilip yazılara ve resimlere müdahale edilecek ise, font ve resimlerin dosya ile gönderilmesi gerekmektedir.
Tasarımda kullanılan yazılara müdahale gerekmiyor ise yazılar konvertlenebilir.
Çalışma PDF olarak kaydedilecek ise tasarım programınızda kaydederken aşağıda ki ayarlara göre PDF kaydetmeniz gerekmektedir.

PDF Kaydetme Ayarları


Adobe Illustrator---File---Save As---Format: Adobe PDF---Adobe PDF Preset---PDF/X-4:2008---Compatibility: Acrobat 8---Advanced---Fonts--- Subset %0

Grafik Limitleri

Maksimum 6 renk pantone,




Ton aralığı, % 3- %95 arasında olmalıdır.

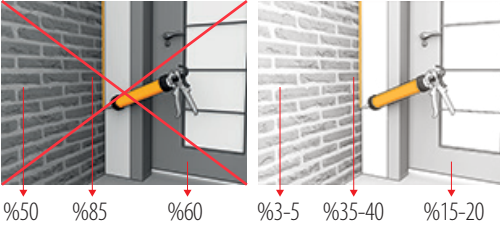

Ton kazancı standart baskı tekniklerine göre çok daha yüksektir.

Örnek olarak dosyada bulunan 50 tram değeri baskıda 90 lara kadar çıkmaktadır.

Grafik hazırlık aşamasında gerekli düzeltmelerin yapılması gerekmektedir.

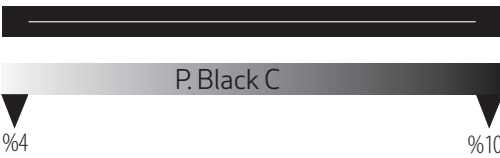


Çizgi kalınlığı min. 0,4 pt.

Degrade geçişlerde maks 1 pantone renk kullanılmalıdır.



Orjinal



P. 284 C



P. Black C

Resimlerde zemin üst üste gelmeyecek şekilde en fazla 2 Pantone.

Yazı Limitleri

İtalik ve serifli fontlar kullanılmamalıdır.

En küçük punto olarak 5 punto, dışı yazılarda 5 punto bold ve üzeri puntolar kullanılmalıdır.


İz Baskı	İz Baskı	İz Baskı	İz Baskı	İz Baskı	İz Baskı
İz Baskı	İz Baskı	İz Baskı	İz Baskı	İz Baskı	İz Baskı
5 punto	6 punto	7 punto			

Barkod Limitleri


Magnifcation %80 altına inmemelidir.

Örnek olarak EAN-13 barkod için minimum ; en 30 mm x Boy 17 mm

Sadece tek renk ve barkod alanı beyaz olmalıdır.



Dry Offset Printing Area

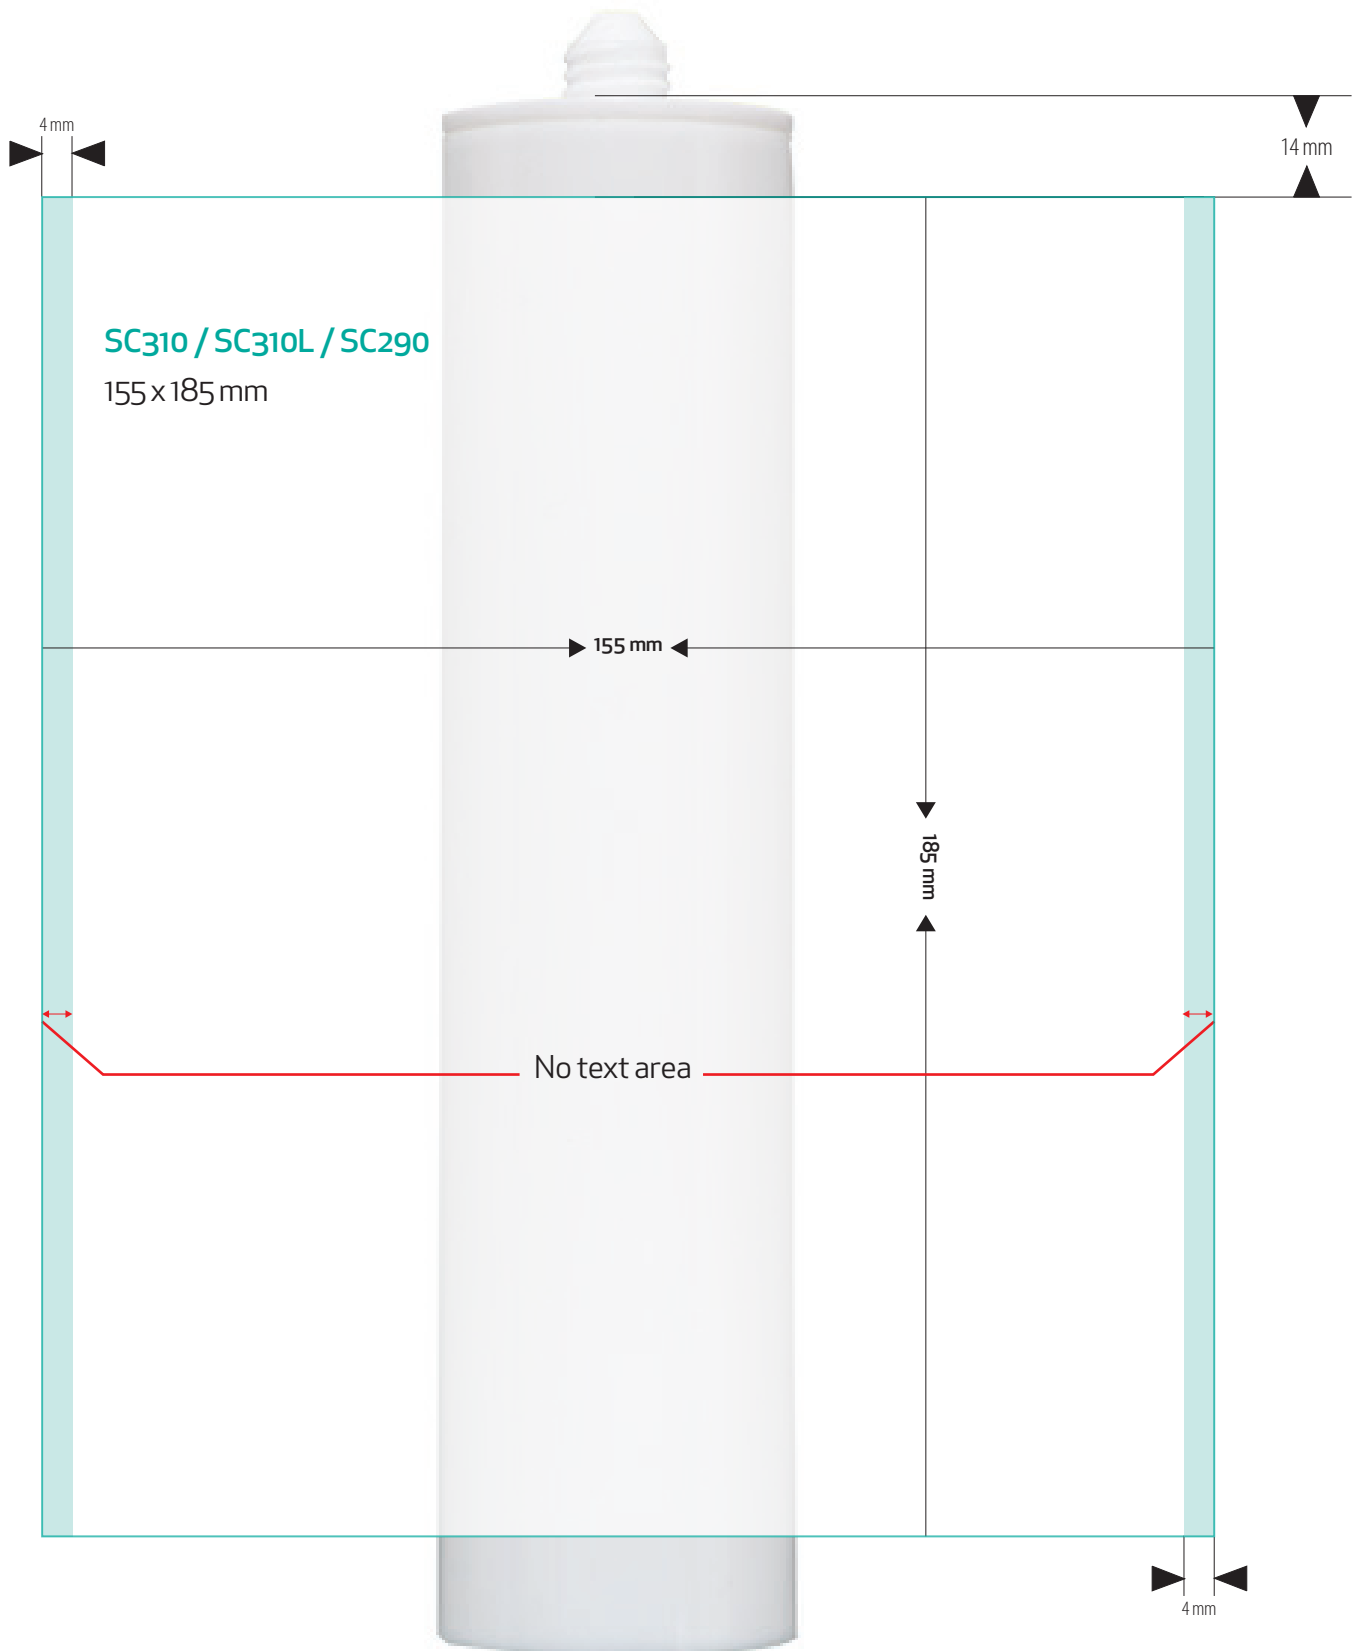


Dry Offset Printing Specs

Accepted file formats:

It must be in Adobe Illustrator or PDF format.
(We are suggesting to make the design in PDF format.)



Images;



300 dpi on used size in artwork,
Color separated with Pantone colors or CMYK, TIFF or PSD
Text should be converted. (vector)
Other objects should be vector.

If we need to edit the Illustrator file, please send the text and images separately with the artwork.

If there is no need for editing the text, you may convert the text..

When sending artwork in PDF format, please save the file according to the settings below.

Save PDF Settings.


Adobe Illustrator---File---Save As---Format: Adobe PDF---Adobe PDF Preset---PDF/X-4:2008---Compatibility: Acrobat 8---Advanced---Fonts---Subset %0

Graphic Limits


Maximum 6 Pantone Separations,



Tint values range should be between 3% - 95%.

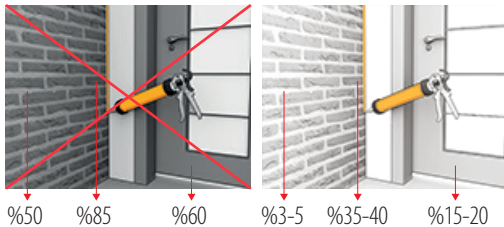

Tone value increase is higher then the standart printing techniques.
50% tint values may reach up to 90%.
This should be considered and compansated during graphic design.

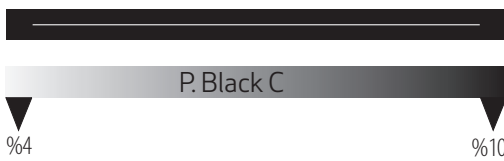


Negative line tickness min. 0,4 pt.

Max. one Pantone seperation should be used in gradiations.



Orjinal



P. 284 C



P. Black C

Max 2 Pantone seperations should be used in the images.

Text Limits

Italic and Serif fonts should be avoided.

Min. text size is 5 pt, for negative text its 5 pt bold or bigger.



Barcode Limits


Magnification should be min. 80%

EAN-13 barcode size should be minimum; 30 mm x 17 mm

Only one seperation and with white clear area.



0 902165 930441



0 902165 930441